

Skywire[®] LTE CAT-M1 Embedded Cellular Modem Datasheet

NimbeLink Corp

Updated: February 2018



© NimbeLink Corp. 2017. All rights reserved.

NimbeLink Corp. provides this documentation in support of its products for the internal use of its current and prospective customers. The publication of this document does not create any other right or license in any party to use any content contained in or referred to in this document and any modification or redistribution of this document is not permitted.

While efforts are made to ensure accuracy, typographical and other errors may exist in this document. NimbeLink reserves the right to modify or discontinue its products and to modify this and any other product documentation at any time.

All NimbeLink products are sold subject to its published Terms and Conditions, subject to any separate terms agreed with its customers. No warranty of any type is extended by publication of this documentation, including, but not limited to, implied warranties of merchantability, fitness for a particular purpose and non-infringement.

Skywire and NimbeLink are registered trademarks of NimbeLink Corp. All other trademarks appearing in the document are the property of their respective owners.

Table of Contents

Table of Contents	2
Introduction	4
Orderable Part Numbers	4
Product Overview	4
Block Diagram	4
Technical Specifications	5
Electrical Specifications	5
Absolute Maximum Ratings	5
Recommended Ratings & Module Pin out	5
Connectors J1 and J2	5
Connectors J3, X1, X2	6
Mechanical Specifications	8
Mechanical Characteristics	8
Mating Connectors	8
Device Placement	8
Environmental Specifications	8
Important Design Considerations	9
PWR_ON Signal	9
Power Supply Requirements	9
Serial Communications	9
Baudrate	9
FOTA	9
Mounting Guidelines	10
Board to Board connectors approach	10
Solder to Board connection approach	11
Antenna Considerations	12
Primary Antenna Requirements	12
Recommended Antennas	12
Certifications	12
Carrier Specific	12
Geography Specific	13
Federal Regulatory Licensing	13

1. Introduction


1.1 Orderable Part Numbers

Orderable Device	Firmware Revision	Operating Temp	Bands	Network Type
NL-SW-LTE-SVZM20	LR5.1.1.0-32110	-40 to +85°C	B4, B13	Verizon

1.2 Product Overview

Add robust cellular connectivity to your M2M devices with scalable radio technology with the Skywire® line of modems, including CAT-M1 based LTE solutions. Extensive experience in designing and building embedded product solutions makes the NimbeLink Skywire embedded cellular modem the smallest on the market. It complies with the Skywire standard interface and supports multiple LTE bands minimizing costs of hardware and network access. The module is designed for volume production and is intended for OEMs to embed into end equipment designs.

1.3 Block Diagram

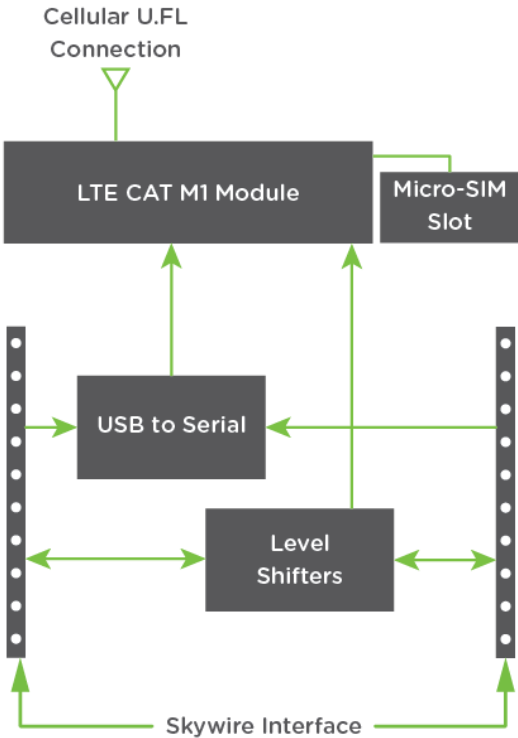

2. Technical Specifications

2.1 Electrical Specifications

2.1.1 Absolute Maximum Ratings

Parameter	Signal	Maximum Rating
Main Power Supply	VCC	5.1V
I/O Voltage Reference	VREF	5.5V

2.1.2 Recommended Ratings & Module Pin out

2.1.2.1 Connectors J1 and J2

Pin	Name	Direction	Description	Min	Typical	Max	If not used
1	VCC	Input	Main Power supply	3.1V	3.8V	4.5V	Must be implemented.
2	DOUT	Output	UART data out, I/O level tied to VREF	VOL: GND to 0.55V		VOH: VREF x 0.67 to VREF	Must be implemented.
3	DIN	Input	UART data in, I/O level tied to VREF	VIL: GND to 0.15V		VIH: VREF-0.4V to VREF	Must be implemented.
4	GND	Input	Ground Pin		0		Must be implemented.
5	RESET_N	Input	Controls RESET_N input on modem, tie low for a minimum of 1uS and released to activate. Internally pulled up to 1.8V. Drive with open collector output. Assert only in an emergency as the module will not gracefully exit the cellular network when asserted.	0		1.8V	Must be implemented.
6	VUSB	Input	Supply for USB interface	4.5V	5V	5.5V	No connection if not used.
7	USB_D+	I/O	USB differential Data + signal				No connection if not used.
8	USB_D-	I/O	USB differential Data - signal				No connection if not used.
9	WAKE	Input	Wakes up the modem from low power modes. Default configuration for wakeup is a low to high transition on this line	VIL: GND to 0.15V		VIH: VREF-0.4V to VREF	Tie to GND.
10	GND	Input	Ground Pin		0		Must be implemented.
11	GND	Input	Ground Pin		0		Must be implemented.
12	CTS	Output	Modem Clear to Send hardware flow control output	VOL: GND to 0.55V		VOH: VREF x 0.67 to VREF	No connection if not used.

13	ON_STAT US	Output	Signal drives high indicating the modem is on and ready for commands. (It can be idle, or in sleep mode)	0		1.8V	No connection if not used.
14	VREF	Input	Voltage reference for off board I/O signals. This signal drives the input voltage side of an onboard buffer which converts all external I/O voltage from VREF range to 1.8V range to drive the onboard modem module.	1.65V	1.8V or 3.3V	5.5V	Must be implemented.
15	GND	Input	Ground Pin		0		Must be implemented.
16	RTS	Input	Modem Request to Send hardware flow control input	VIL: GND to 0.15V		VIH: VREF-0.4V to VREF	No connection if not used.
17	Reserved		Reserved.				No connection if not used.
18	Reserved		Reserved.				No connection if not used.
19	RING	Output	Signal wakes up a host processor when there is incoming traffic on the network	VOL: GND to 0.55V		VOH: VREF x 0.67 to VREF	No connection if not used.
20	ON_OFF	Input	Modem PWR_ON is active low Internally pulled up to internal I/O rail with resistor. Do not use any external pull ups. Note: If you want modem to turn on automatically when power is applied, permanently tie this signal to GND.	0		1.8V	Must be implemented.

2.1.2.2 Connectors J3, X1, X2

Connector Designator	Description	Connector Location
J3	Micro SIM Connector	Bottom Side of Module
X1	Primary Antenna Connection	Topside of Module

2.1.2.3 Typical Power Consumption

Mode	Attenuation (dB)	RSRQ	RSRP	Average Current (mA)	Peak Current (mA)	Average Charge (μ Ah)	Measurement Notes
Active Socket Dial	0	21	72	183.04	196.69	291.60	Tested at 3.8V Time elapsed: 5.74s Test: Open socket, HTTP POST, read HTTP response, power off
Active Socket Dial	20	14	50	183.63	404.21	297.69	Tested at 3.8V Time elapsed: 5.84s Test: Open socket, HTTP POST, read HTTP response, power off
Active Socket Dial	40	14	30	191.58	514.44	310.94	Tested at 3.8V Time elapsed: 5.85s Test: Open socket, HTTP POST, read HTTP response, power off
Off	0	12	64	5.349 (μ A)	5.702 (μ A)	446.940 (nAh)	Tested at 3.8V Issued AT+SQNSSHDN, RTS and WAKE held HIGH, 5 minute sample
Idle	0	12	64	187.46	497.62	15.61	Tested at 3.8V Powered on and registered on the network
Start PSM Countdown	0	16	62	178.62	198.94	878.11	Tested at 3.8V Issue PSM commands, RTS and WAKE held HIGH, 16 second timer from network, 17.72 seconds to enter pre-PSM
Pre-PSM Mode	0	16	62	2.06	168.72	55.19	Tested at 3.8V Skywire will stay in this mode for about 90 seconds in case AT interface is needed again. It is more power efficient to stay in this mode in the event of needing the interface sooner. RTS and WAKE held HIGH, elapsed time 94.01 seconds
PSM	0	16	62	6.606 (μ A)	118.18 (μ A)	345.85 (nAh)	Tested at 3.8V PSM state, RTS and WAKE held HIGH, 189 second sample

2.2 Mechanical Specifications

2.2.1 Mechanical Characteristics

Parameter	Typical	Unit
Dimensions (excluding pin height, for solder to board applications)	29.0 x 33.60 x 6.63	mm
Dimensions (including pin height, for board to board connector applications)	29.0 x 33.60 x 10.73	mm
Weight	0.3	oz
Connector Insertion/Removal	hundreds	Cycles

2.2.2 Mating Connectors

Connector Designator	Manufacturer	Populated on Module	Recommended Mate	Mate Manufacture
J1, J2	3M	951110-2530-AR-PR	950510-6102-AR	3M
			Acceptable alternate: NPPN101BFCN-RC	Sullins Connector Solutions
J3	Molex	786463001	Micro SIM Card	Micro SIM Card
X1, X2	Hirose	U.FL-R-SMT(10)	CAB.011	Taoglas

2.2.3 Device Placement

⚠ Make sure the Skywire is installed in the correct orientation; failure to do so will damage the device and void the warranty.

2.3 Environmental Specifications

Parameter	Min	Typical	Max	Unit	Note
Operating Temperature	-30	25	+60	°C	
Extended Temperature*	-40	25	+85	°C	
Operating Humidity	20		90	%	Non-condensing

* Transmit power limited during Extended Temperature operation

3. Important Design Considerations

3.1 PWR_ON Signal

To conserve power, the Skywire modem does not automatically start up when power is applied. The baseboard design must supply a means to assert the PWR_ON signal low. The signal is level sensitive. After asserting the PWR_ON signal, software must wait for device to boot up before attempting to communicate with the Skywire Modem. To make module automatically start when power is applied, tie PWR_ON signal to GND permanently.

3.2 Power Supply Requirements

The module will regularly consume high amounts of current on the Main Power Supply (VCC), up to 500mA during active transmits and receives. The baseboard power supply should be designed to support peak currents up to 1 Amp. A 100uF capacitor should be placed near the VCC pin on the module to ensure ample energy is available, with a low inductance path to the VCC pin. For example power supply designs, there are multiple references available. See the NimbeLink Skywire Development Kit schematic for a switching regulator example.

3.3 Serial Communications

The Skywire Modem can communicate over UART for AT commands and PPP interface. The USB interface is only provided as a path for firmware update and is not available for issuing AT commands.

3.4 Baudrate

The default baudrate of the NL-SW-LTE-SVZM20 is 921600 baud 8N1. Please make sure to change the settings of your terminal program to reflect this.

3.5 FOTA

LTE networks are constantly being updated, improved, and enhanced with new features. As a result, carriers are making frequent network changes. Most will not negatively affect devices connected to those networks, but occasionally an update will prevent an unprepared device from re-connecting to the network permanently.

To account for these future changes, FOTA (Firmware over the Air) capability is being added to all cellular modules by each module manufacturer, and NimbeLink supports this functionality in the Skywire family of embedded modems. However, there is often a requirement to implement support for this FOTA functionality in your device firmware.

As a developer using the Skywire modem, it is required that your device firmware plan to accommodate FOTA updates after deployment. Failure to do so may result in interruption of your device's cellular connectivity if the carriers implement a network change. If the device can no longer access the network, FOTA cannot be used to resolve the situation after the fact. The only way to restore connectivity will be physical access to the device to perform the updates directly on the device.

FOTA Instructions are available by contacting Nimbelink's product support team at product.support@nimbelink.com.

4. Mounting Guidelines

The Skywire embedded cellular modem supports multiple connection methods, the two primary methods are board to board connectors and soldering directly to the baseboard.

4.1 Board to Board connectors approach

The Skywire form factor calls for two, 10 pin, 2mm pitch female receptacles.

There are many connector manufacturers that can be used; below is one readily available product:


Manufacturer: 3M


Alternate: Sullins Connector Solutions

Part Number: 950510-6102-AR

Alternate P/N: NPPN101BFCN-RC


Typical part drawing and footprint information:

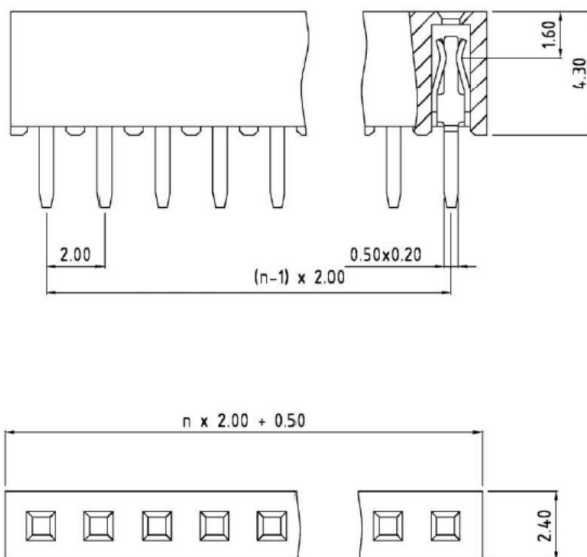

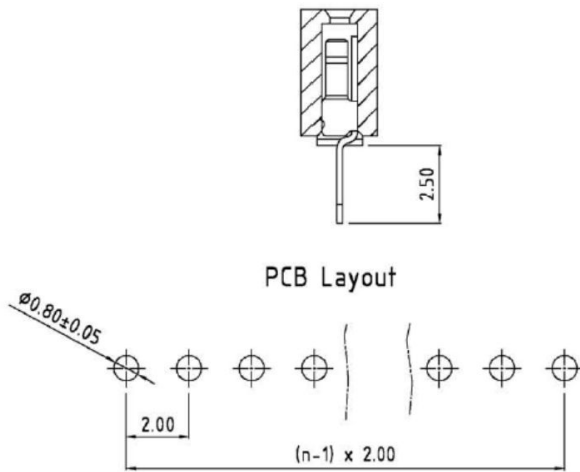

4.2 Solder to Board connection approach

The module can be soldered directly to a PCB. The PCB should be designed with two rows of ten, 0.8mm plated thru holes spaced 2mm apart. The two rows should be 22mm apart. See drawing for recommended footprint. Measurements are in millimeters. U.FL locations are marked with circles, X1 and X2 on top side of board, J3 is Micro SIM card slot on bottom side of board.

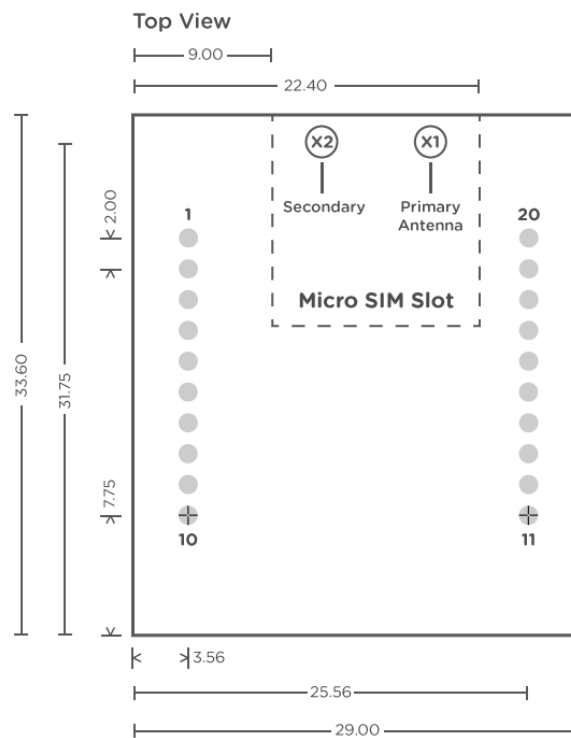

5. Antenna Considerations

5.1 Primary Antenna Requirements

Designers should review latest VZM20Q Hardware User Guide to ensure the information is up to date.

PRIMARY ANTENNA REQUIREMENTS	
Frequency Range	Depending on the frequency bands provided by the network operator, the customer shall use the most suitable antenna for those bands
Bandwidth	LTE B4(1700): 445MHz LTE B13(700c): 41MHz
Impedance	50 ohm
Input Power	>24dB

5.2 Recommended Antennas

Type	Manufacturer	Part Number
Primary Cellular	Taoglas ¹	TG.30.8113

Note 1: U.FL to SMA adapter required.

For applications not using the recommended antennas, developers must ensure that the selected antenna(s) meet certain requirements. In order to maintain FCC and carrier specific certifications the antennas cannot exceed the maximum gain levels listed here:

Frequency	Max Gain (dBi)
700 MHz Band	TBD
1700 MHz Band	TBD

6. Certifications

6.1 Carrier Specific

NL-SW-LTE-SVZM

Verizon OD Certified

6.2 Geography Specific

Federal Communications Commission (FCC47) part 22, 24

Complies with FCC47 Part 15 Class B Radiated and Conducted Emissions

7. Federal Regulatory Licensing

7.1 Export Control Classification Number (ECCN)

ECCNs are five character alpha-numeric designations used on the Commerce Control List (CCL) to identify dual-use items for export control purposes. An ECCN categorizes items based on the nature of the product, i.e. type of commodity, software, or technology and its respective technical parameters.

NL-SW-LTE-SVZM (and all Skywire Modems): 5A992.c

7.2 Harmonized Tariff Schedule Code

HTS Code: 8517.62.0010

8. End Product Labeling Requirements

Device Uses Approved Radio: NL-SW-LTE-SVZM

Contains FCC ID:TBD and IC ID: TBD

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interferences, and (2) this device must accept any interference received, including interference that may cause undesired operation.